


**Important:**

Construction-related expansion gaps in the substrate must likewise be adopted in the BASWaphon acoustic system!

The air-tight vapour barrier adhesive tape over the plasterboard expansion gap must be used in such a way that it can absorb the movements of the expansion gap. Such seals prevent air circulation through the open-pore acoustic system (prevention of partial dust deposits in the top coat).

Contact spray adhesive for installation assistance will be sprayed on both sides of the bonding (misting gently) without sealing the pores of the pre-coating of the acoustic panels!

1. BASWaphon – Top surface layer
2. BASWaphon – Base primary layer
3. BASWaphon – Acoustic Panel
4. Plaster adhesive
5. Structural panel, e.g., Fermacell or plasterboard
6. Expansion joint profile, PVC
7. Airtight joint (e.g., Vapour barrier adhesive tape)
8. Expansion joint profile PROOFI 430 n. r-m.
9. Contact spray adhesive (porous)

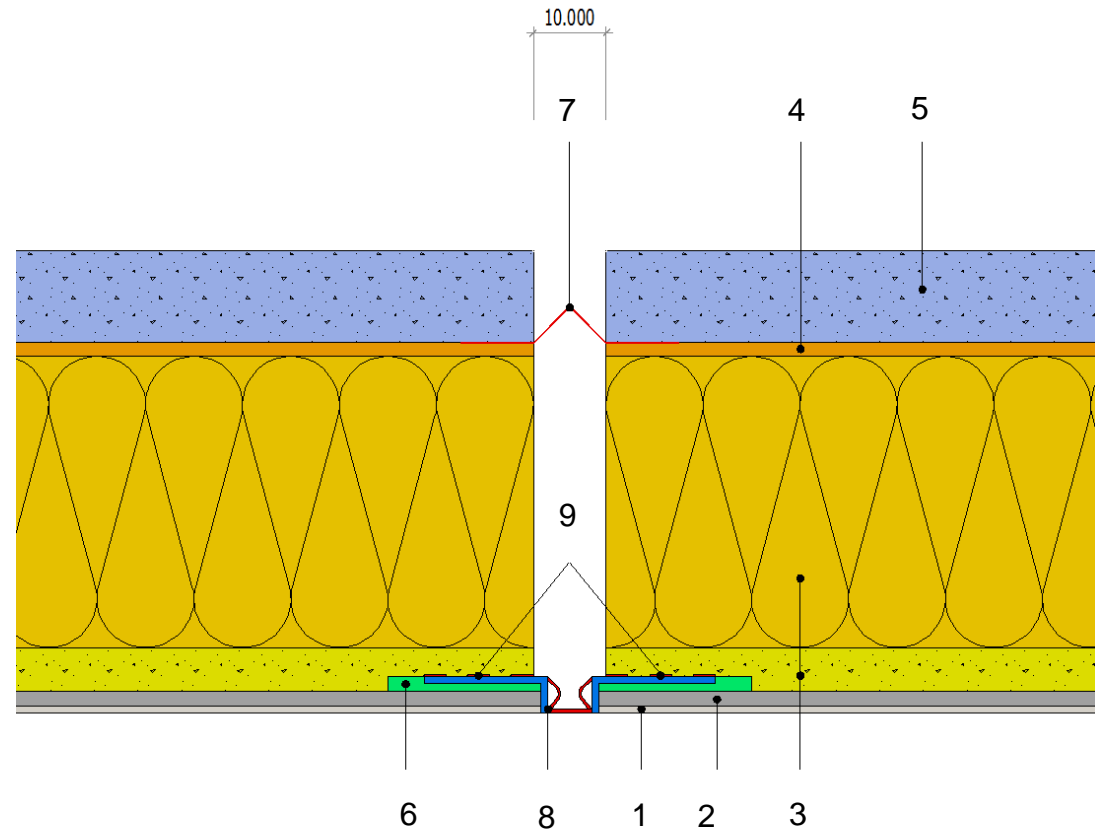

**BASWA acoustic AG**  
Marmorweg 10  
CH – 6283 Baldegg  
www.baswa.com

The structural, static and physical construction characteristics of BASWaphon acoustic systems can only be reached if the sole use and processing of BASWaphon system components according to processing guidelines is ensured.

**Created**  
Gabriell Gjonlleshaj

**Date**  
Aug. 31, 2010

**Reviewed**  
Eric Sulzer

**Approved**  
Guido Koch

Technical changes reserved. The then-current version applies. Our guarantee only applies to the flawless composition of our materials. Information regarding usage, amounts and versions is based on experience, which cannot be transferred to differing conditions without adjustments. The information included in the diagram complies with the current state of the art. However, it cannot contain the entirety of generally accepted rules of civil engineering, applicable standards, guidelines and technical rules. These must be observed appropriately, in addition to the processing regulations, by the person performing the work. All rights reserved. Changes, reprints and photomechanical, as well as electronic, reproduction, even in excerpts, require the explicit permission from BASWA acoustic AG, Marmorweg 10, 6283 Baldegg, Tel.: +41 41 914 02 22, Fax: +41 41 914 02 20. Shipment not via the specialized trade. According to our general terms and conditions, shipping and payment conditions (general terms and conditions, see www.baswa.com), only to certified processors.